
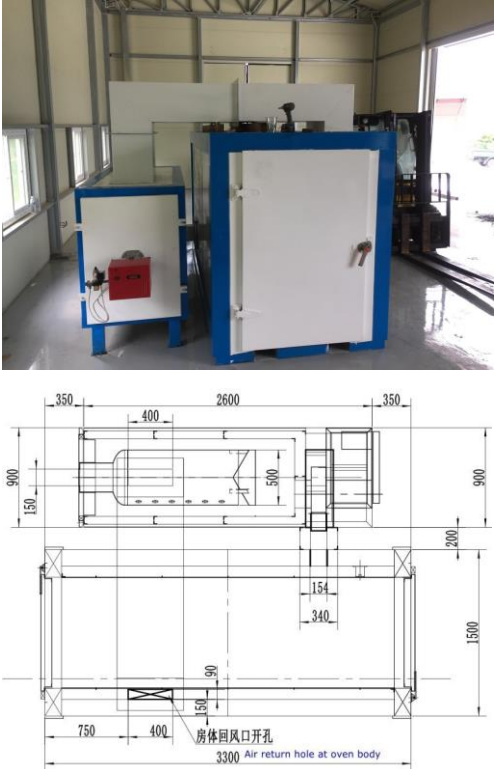
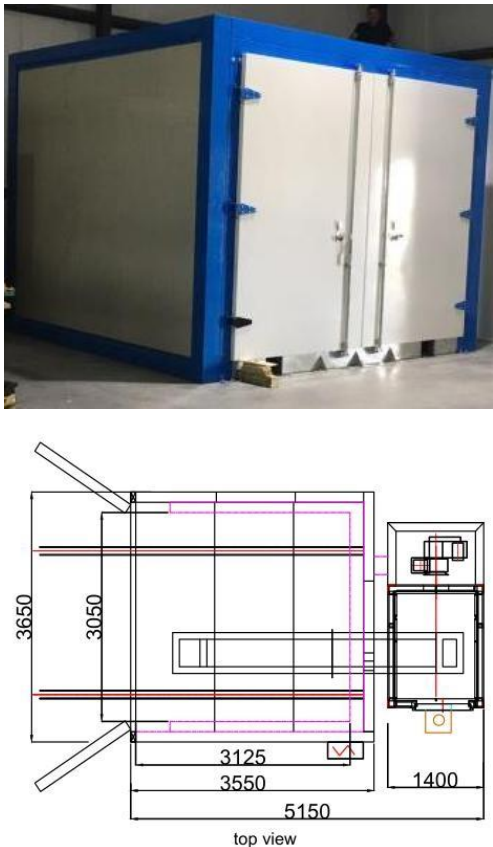
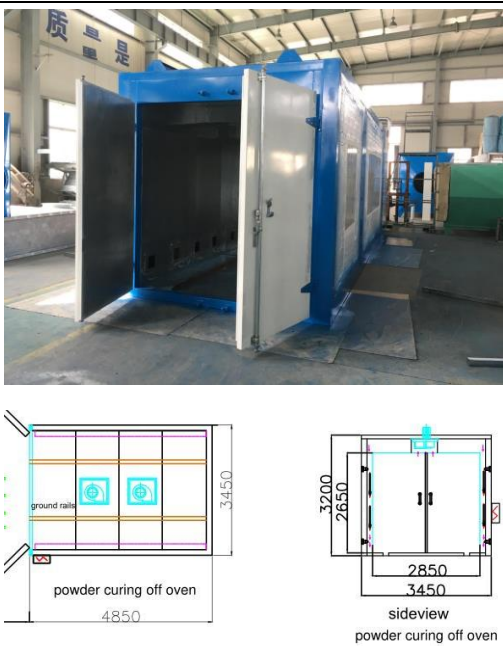


Curing Oven Catalogue

Model	Picture	Specifications
colin - 160		<p>Available dimensions: 875x845x1600mm (L*W*H); Exterior dimensions: 1115x 1165x 2040mm (L*W*H); Power supply: Electric/ 3x2kw - Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180° C) Temperature stability : <math>\pm 1-3^{\circ}</math> C Temperature max. 250° C Warranty: 12 months</p>
colin - 300		<p>Available dimensions: 3000*1000*1600mm (L*W*H); Exterior dimensions: 3300*1500*2100mm (L*W*H); Power supply: FS5 LPG burner; 1 unit 0.55kw high temperature resisting fan; Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180° C) Temperature stability : <math>\pm 1-3^{\circ}</math> C Temperature max. 250° C Warranty: 12 months</p>

<p>colin - 330</p>	 <p>top view</p>	<p>Available dimensions: 3125 * 3050 * 2500mm (L*W*H); - Exterior dimensions: 3550 * 3650 * 3000mm (L*W*H); Power supply: FS10 Gas burner; - 1 unit 1 unit 5.5kw Y5-48-4C high temperature resisting fan; - Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180° C) Temperature stability : <math>\pm 1-3^{\circ}</math> C Temperature max. 250° C Warranty: 12 months</p>
<p>colin - 460</p>	 <p>sideview powder curing off oven</p>	<p>Available dimensions: 4600 * 2850* 2650 mm (L*W*H); Exterior dimensions: 4850*3450*3200mm (L*W*H); Power supply: Electric / 42sets *3kw =138kw Sustainless electric heating tubes; 2 unit 4kw YW5-47 high temperature resisting fan; - Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180° C) Temperature stability : <math>\pm 1-3^{\circ}</math> C Temperature max. 250° C Warranty: 12 months</p>

<p>colin -560</p>		<p>Available dimensions: 5600*2300*3300mm (L x W x H); Exterior dimensions: 5900*2600*3525mm (L*W*H); Power supply: Diesel/ 1unit Riello Brand diesel burner G20 1 unit 5.5kw high temperature resisting fan; - Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180°C) Temperature stability : <math>\pm 1-3^{\circ}\text{C}</math> Temperature max. 250° C Warranty: 12 months</p>
<p>colin - 600</p>		<p>Available dimensions: 6000 * 1700* 3200 mm (L x W x H); Exterior dimensions: 6300 * 2150 * 3580 mm (L*W*H); Power supply: Diesel/ 1unit Riello Brand diesel burner FS20 - 1 unit 5.5kw Y5-48-5C high temperature resisting fan; - Voltage/Frequency: 380V/220v(50-60hz); Warm-up time: 15-30 min. (180° C) Temperature stability : <math>\pm 1-3^{\circ}\text{C}</math> Temperature max. 250° C Warranty: 12 months</p>

colin -700		<p>Available dimensions: 7300*1700*2100mm (L x W x H);</p> <p>Exterior dimensions: 7600*2300*2600mm (L*W*H);</p> <p>Power supply: Electric/ 36units*3kw=108KW stainless steel electric heating tube;</p> <p>2 units 4kw high temperature resisting fan YW5-47; - Voltage/Frequency: 380V/220v(50-60hz);</p> <p>Warm-up time: 15-30 min. (180° C)</p> <p>Temperature stability : <math>\pm 1-3^{\circ}</math> C</p> <p>Temperature max. 250° C</p> <p>Warranty: 12 months</p>
colin -1000		<p>Available dimensions: 10350x 2350x 2675mm (L x W x H);</p> <p>Exterior dimensions: 10600x 2650x 2900mm (L*W*H);</p> <p>Power supply: Gas/ units of Riello RS5 natural gas burner.</p> <p>1 set 7.5kw high temperature resisting fan; - Voltage/Frequency: 380V/220v(50-60hz);</p> <p>Warm-up time: 15-30 min. (180° C)</p> <p>Temperature stability : <math>\pm 1-3^{\circ}</math> C</p> <p>Temperature max. 250° C</p> <p>Warranty: 12 months</p>

Remark:

- 1) The working voltage can be same as request such as 110/220/380/415V/ 460V, etc.
- 2) The size can be custom-made;
- 3) The heating system could be specially designed;
- 4) Trolley can be designed as request



Italy Brand Riello Burner



Stainless Steel Electric Heating Tubes



Control Panel